

## Features


- 2.4 GHz wireless transmitter and receiver with 4 selectable channels.
- Transmitting and receiving of crisp video and hi-fi stereo even through walls.
- Long transmission range up to 400 feet clear line-of-sight.
- NTSC/PAL video format available.
- Built-in IR remote extender for extending control range of IR remotes up to 100 feet even through walls.

## Description

The AWV372/372S video sender sports a new industrial design with a hidden omnidirectional antenna. It consists of one transmitter and one or multiple receivers. The input and output ports can be optionally RCA or SCART. This device transmits vivid video and hi-fi stereo sound from a VCR · TV set · LD · DVD · VCD · Satellite Receiver or cable set top box to any TV or monitor. It can also be used in conjunction with a camcorder or CCD camera and turns into a wireless security monitoring system. As to the transmission capability, the signal can go up to 400 feet clear line-of-sight and even penetrate through walls. With the built-in IR remote extender, it allows the user to remotely control the audio/video sources in the other rooms. In addition, four user selectable channels allow multiple transmitters to multiple receivers operation in the same area. All these advanced features will make your home life amazingly convenient and joyful.

## Applications

- Simultaneous viewing of video programs on a 2nd TV/monitor without wires.
- Wireless transmission of hi-fi stereo to any active speaker.
- Remotes monitoring of live video from a camcorder or CCD camera.
- Local area broadcasting of audio/video programs for multiple viewers even in different rooms.

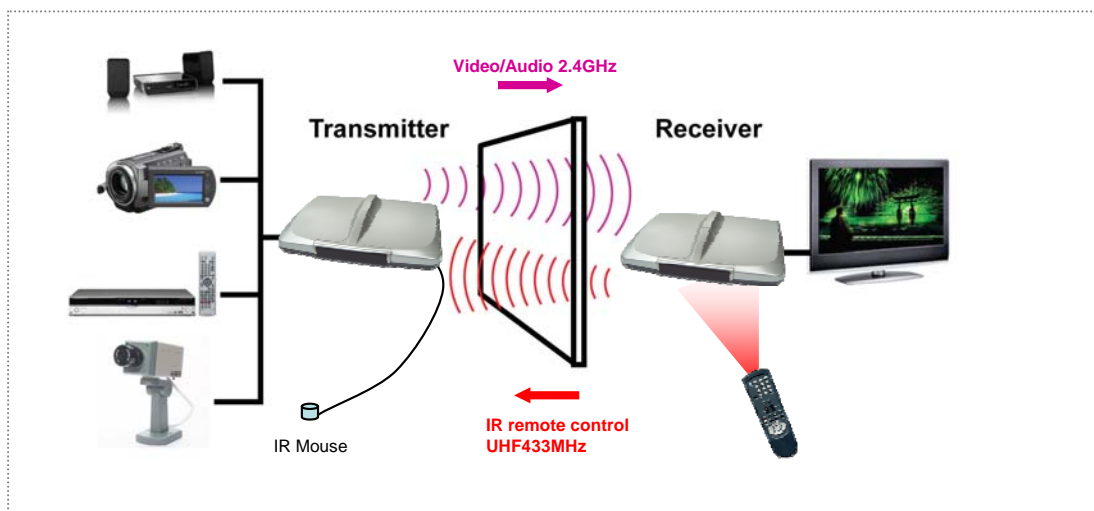

## Accessory

- |                     |    |
|---------------------|----|
| •AC/DC adaptor      | x2 |
| •RCA or SCART cable | x2 |
| •User manual        | x1 |
| •IR mouse           | x1 |

## Housing color option

- Dark Gray (standard)
- Light Gray (optional)



## TECHNICAL SPECIFICATION

### General SPEC:

Frequency Range	2400 ~ 2483MHz
Channel Selection	PLL Synthesizer 4CH
Video/Audio Mod/Demod. Type.	FM-FM
Antenna Type.	Omni-directional Dipole
Video Polarity	Negative
Supply Voltage	DC +9V / 500mA
DC IN Jack	5.5mm
Power On Indicator	LED, Red
Channel Indicator	Slide Switch
Built-In IR Remote Extender	Yes
Operating Frequeccy	433.92MHz
IR Mod. / Demod. Type.	ASK

### Transmitter

Supply Current	270mA $\pm$ 40mA
Input Port	RCA in (AWV372); Scart (AWV372S)
Output Power	10dBm; 17dBm (high power)

### IR Remote Extender – RF Receiver

Receiving Sensitivity	-95dBm, min.
IR Carrier Frequency	34KHz $\pm$ 1.5KHz
IR Operation Range	2 Meters
IR LED Half Angle	$\pm$ 45° Horizontal
External IR LED Port	3.5mm Mono Phone Jack

### Receiver

Supply Current	330mA $\pm$ 40mA
Output Port	RCA out (AWV372); Scart (AWV372S)
Input Sensitivity	-85dBm, Typ. ( @ Video S/N Ratio $\geq$ 19dB)
Video Output	1Vp-p $\pm$ 0.2V
Video S/N Ratio	37dB, min
Audio Output	3.5Vp-p $\pm$ 0.5V
Audio THD	3%, max.
Audio S/N Ratio	40dB, min.

### IR Remote Extender – RF Transmitter

RF Output Power	10dBm; 15dBm (high power)
IR Receiver Tuning Freq.	34KHz
IR Operation Range	7.5 Meters, min
IR Sensor Half Angle	$\pm$ 45° Horizontal

2.4GHz wireless AV sender



**AIRWAVE**

AIRWAVE TECHNOLOGIES INC.  
4F, NO.9 INDUSTRIAL E. 9TH RD.  
SCIENCE-BASED INDUSTRIAL  
PARK TAIWAN R.O.C.  
TEL.: 886-3-5778099  
FAX : 886-3-5778199  
<http://www.airwave.com.tw>

Copyright ©2007  
AIRWAVE Technologies Inc.  
All Rights Reserved.

\*\*All Specification are subject to change without notice.

*Airwave - Wireless Everywhere*