

FOR	Company	
	ATTN	

保密宣告
(Classified Info.)

本文列為機密文件，受雙方 NDA(Non-Disclose Agreement)所規範。
 基此，請妥善保管文件，不可外洩給與合約無關之第三者造成雙方之損失。
 The information contained herein is the exclusive property of Airwave Technologies Inc. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Airwave Technologies Inc.

Data Sheet



AWM682 RX

5.8 GHz Wideband FM Receiver

承認	承認	品保	工程
Dr. T.H. Chen	Ben Huang	Sandy Chen	Shih Chuan Lin
Approve	Approve	QA	E/E



AIRWAVE TECHNOLOGIES INC.

Contents

1. Descriptions	4
2. Feature	4
3. Application	4
4. Function block	5
5. Pin define	5
6. Pin descriptions	6
7. Absolute maximum ratings	6
8. DC/AC Electrical characteristic	7
9. Reference circuit	8
10. Dimension	9

CONFIDENTIAL

AIRWAVE TECHNOLOGIES INC.

1. Descriptions:

Airwave 5.8GHz Audio/Video wireless RF module contains one Transmitter and one Receiver. Using of the most popular 5.8GHz ISM band and being designed with high reliability, Airwave RF module is compliance with the criteria of FCC and R&TTE which can transmit/receive a wide band audio & video signals up to 300 feet in open area. AWM682 RX module uses down conversion concept to convert the 5.8GHz RF Signal to 480 MHz IF signal, and then obtain base band via PLL FM demodulation IC by Airwave AWI5822.

2. Feature:


- Worldwide 5.8GHz ISM band (5725 MHz~5875 MHz).
- Conform to R&TTE & FCC stipulation.
- Compatible with both NTSC and PAL video formats.
- Compact size and low power consumption.
- Highly efficient FM-FM modulation/demodulation scheme.
- Integrating Audio/Video input and output into one module base band PCB.
- Provide with 7 selectable channels.
- Received signal strength indicator (RSSI).

3. Application:

- AV Sender
- Baby Monitor
- Surveillance
- Wireless Camera

AIRWAVE TECHNOLOGIES INC.

4. Function block:

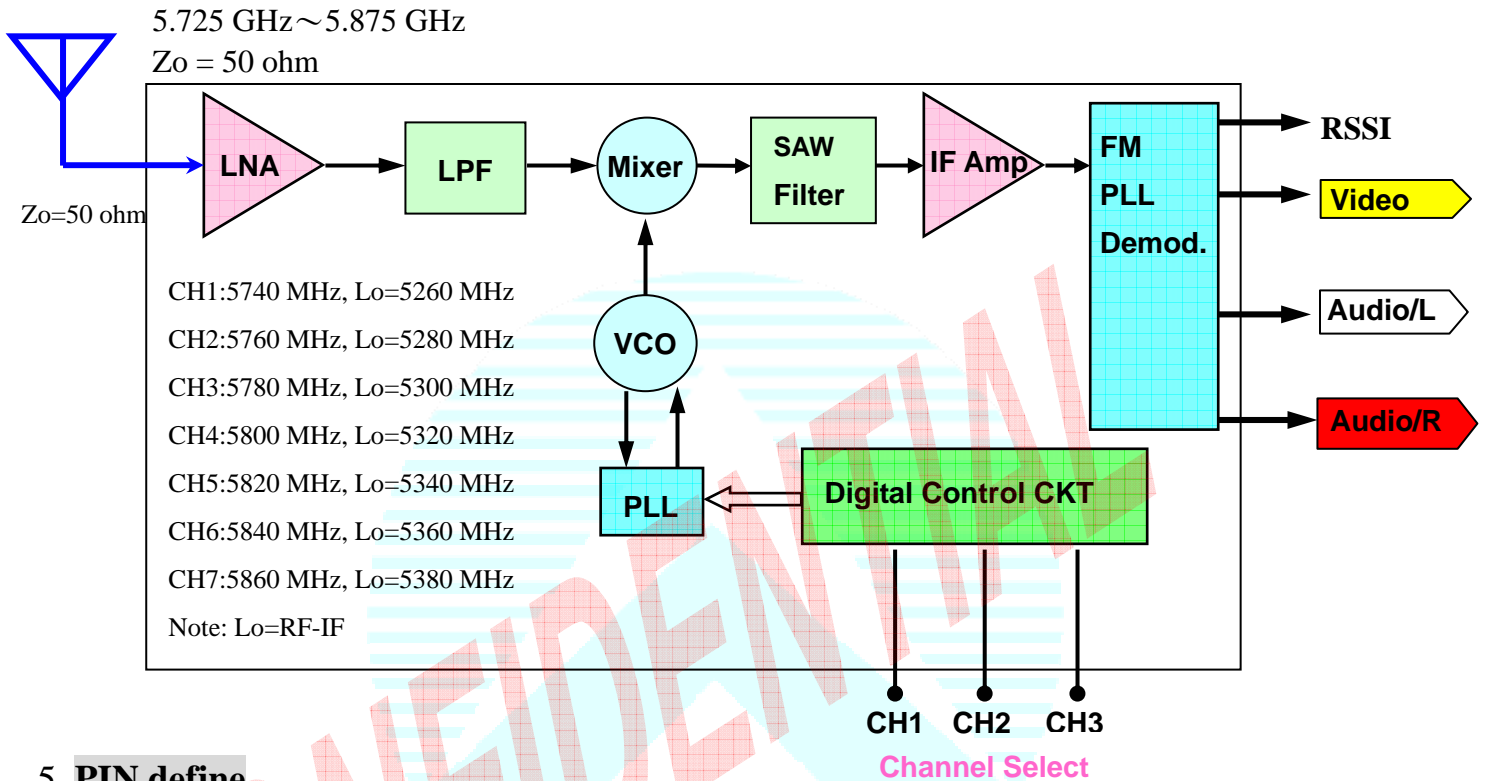

5. PIN define

Pin 01 GND
Pin 02 RSSI
Pin 03 A/R
Pin 04 A/L
Pin 05 Video
Pin 06 VCC
Pin 07 Bypass
Pin 08 SW
Pin 09 Bit2
Pin 10 Bit1
Pin 11 Bit0
Pin 12 GND



GND Pin 13
RFIN Pin 14

AIRWAVE TECHNOLOGIES INC.

6. PIN descriptions:

AWM682 RX

PIN	NAME	Descriptions	PIN	NAME	Descriptions
01	GND	Ground	08	SW	Channel select. (See table 1)
02	RSSI	Received signal strength indicator	09	Bit2	Channel select. (See table 2)
03	A/R	Right sound signal output	10	Bit1	Channel select. (See table 2)
04	A/L	Left sound signal output	11	Bit0	Channel select. (See table 2)
05	Video	Video signal output	12	GND	Ground
06	VCC	DC +5V supply in	13	GND	RF Ground Pad
07	Bypass	DC Bypass	14	RF IN	RF received signal input Pad ⁽¹⁾

For tact sw mode, Bit2, Bi1, Bit0 must be treat as output.

SW	Descriptions	Frequency
	Tack switch	5740→5760→5780→5800→5820→5840→5860(MHz) CH1 CH2 CH3 CH4 CH5 CH6 CH7

Channel selection are seven channels by Pin20, Pin19 and Pin 18 for dip sw mode As shown below :

Pin09	Pin10	Pin11	Descriptions	Receiver Frequency
Bit2	Bit1	Bit0		
0	0	0	Pin09, Pin10, Pin11 connect to GND.	5740MHz (CH1)
0	0	1	Pin 09 and Pin 10 connect to GND, Pin 11 OPEN.	5760MHz (CH2)
0	1	0	Pin 09 and Pin 11 connect to GND, Pin 10 OPEN.	5780MHz (CH3)
0	1	1	Pin 09 connect to GND, Pin 10 and Pin 11 OPEN.	5800MHz (CH4)
1	0	0	Pin 10 and Pin 11 connect to GND, Pin 09 OPEN.	5820MHz (CH5)
1	0	1	Pin 10 connect to GND, Pin 09 and Pin 11 OPEN.	5840MHz (CH6)
1	1	0	Pin 11 connect to GND, Pin 09 and Pin 10 OPEN.	5860MHz (CH7)

Note 1: Forced Pin 02 (RSSI) to OPEN if RSSI function is unnecessary.

7. Absolute maximum ratings:

RF/ DC Parameters		Min.	Typ.	Max.	Unit
Storage Temperature Range	AWM682 RX (RSSI)	-25	-	85	°C
Supply voltage	AWM682 RX(RSSI)	-0.5	-	5.5	V

The maximum rating must not be exceeded at any time. Do not operate the device under conditions outside the above.

AIRWAVE TECHNOLOGIES INC.


8. DC/AC Electrical characteristic:

(VCC=DC +5V, 25°C)

RF/ DC Parameters	Min.	Typ.	Max.	Unit
Supply voltage	4.9	5	5.1	V
Supply current	190	210	240	mA
RF Input Level	-85		-10	dBm
Operating temperature	-10	-	60	°C
Operation Frequency Range	5725		5875	MHz
Channel Selection	PLL Synthesizer, 7CH (See Tab1)			
Channel Frequency	CH1 : 5740 MHz, CH2 : 5760 MHz CH3 : 5780 MHz, CH4 : 5800 MHz CH5 : 5820 MHz, CH6 : 5840 MHz CH7 : 5820 MHz.			
Video-Audio Modulation/Demodulation Type	FM-FM			
Video				
Output Signal Level	1V _{P-P} , typ. (+/-0.2Volt)			
Frequency Response	+/-5 dB, max. 50Hz~5.5MHz			
S/N Ratio (100KHz, 1V _{P-P} Sine Wave)	40dB, min.			
Audio				
Output Frequency Range	50Hz ~ 20KHz			
Output Signal Level (Modulation Signal : 1kHz Sine Wave)	1.4~1.9Vp-p			
RSSI				
RSSI output voltage (RF input -10dBm~-85dBm)	0.2~1.5V			



AIRWAVE TECHNOLOGIES INC.

9. Test circuit:

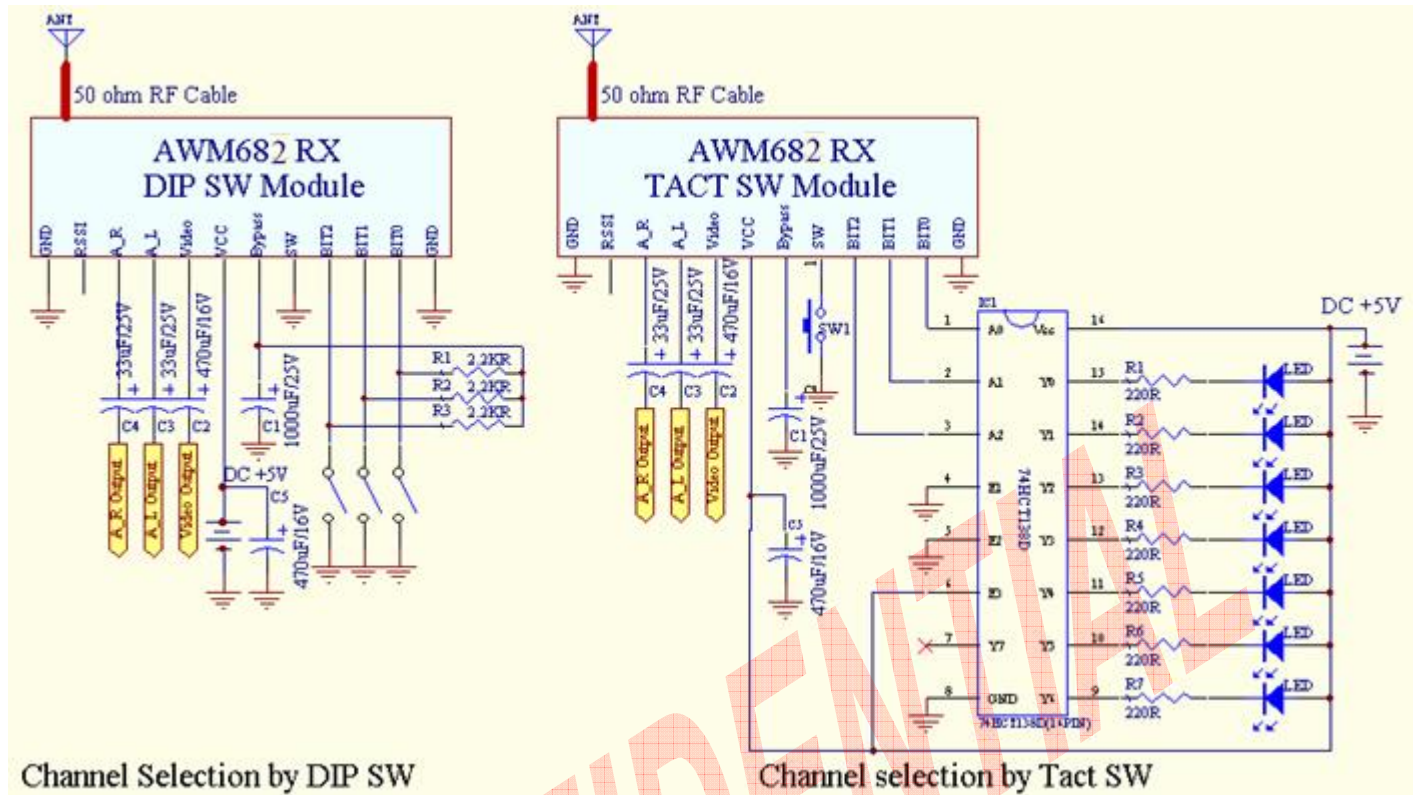

CONFIDENTIAL

10. Dimension:

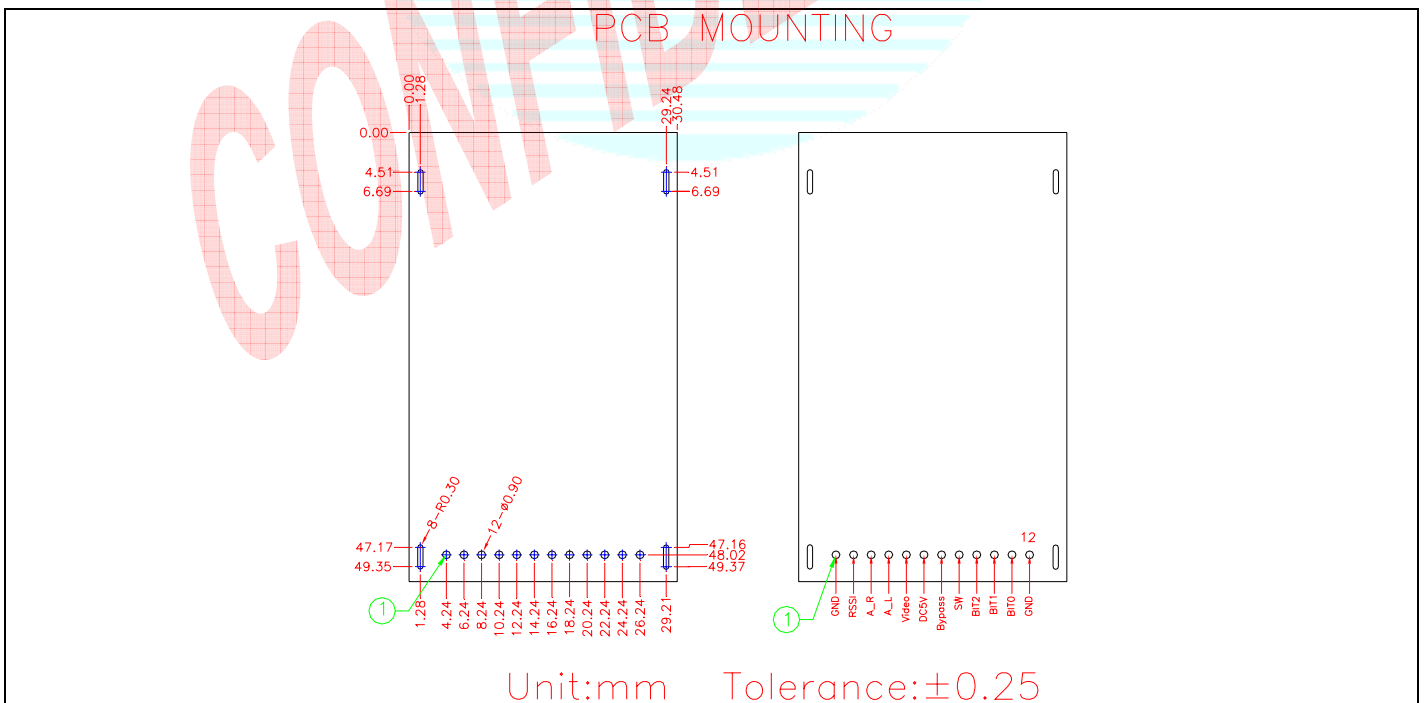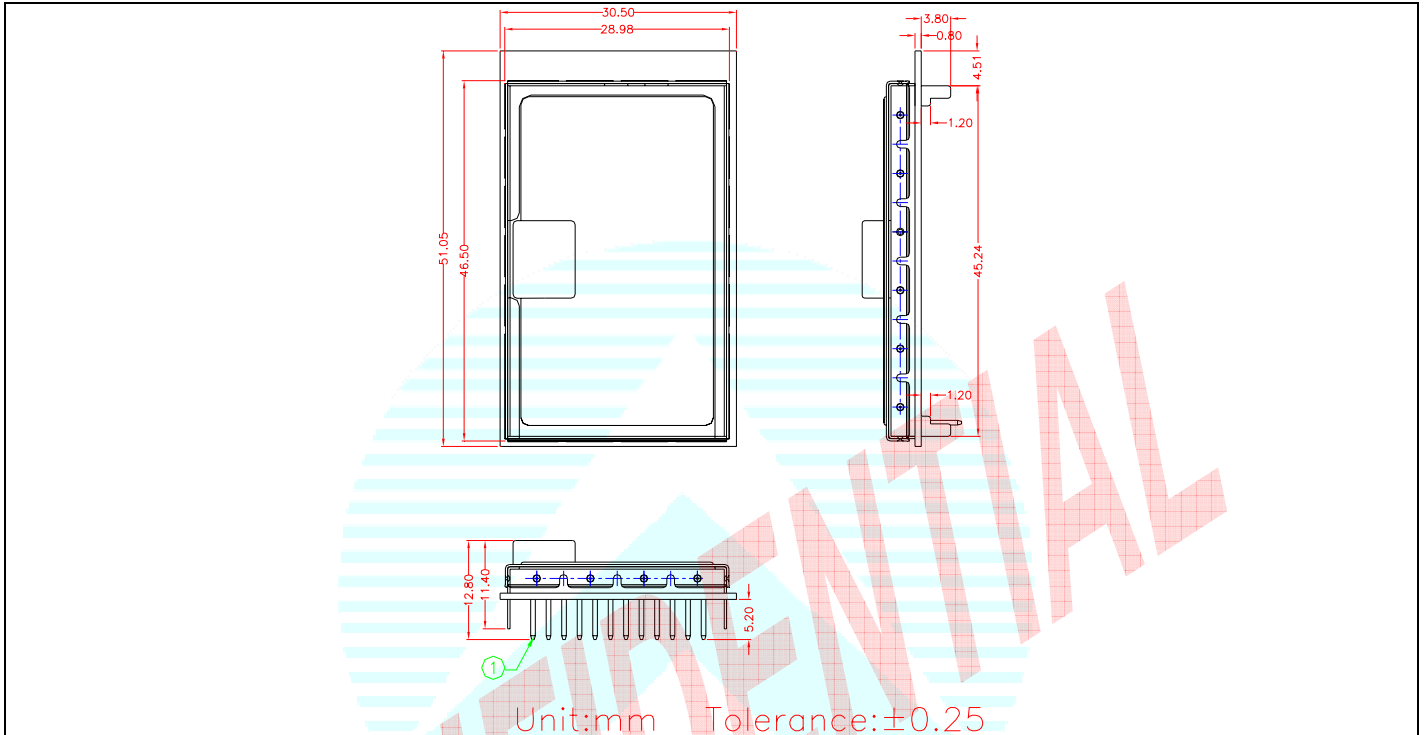

AIRWAVE TECHNOLOGIES INC.