AWV699

Date: 2008.06.13 Rev.: 0

Page 1 of 2



Features


- 5.8GHz wireless transmitter and receiver with 7 selectable channels.
- •Transmitting and receiving of crisp video and hi-fi stereo even through walls.
- •Long transmission range up to 400 feet clear line-ofsight.
- •NTSC/PAL video format available.
- •Built-in IR remote extender for extending control range of IR remotes up to 100 feet even through walls.

Description

This 5.8GHz video sender sports a new industrial design with a highly performance patch antenna. It consists of one transmitter and one or multiple receivers. The input and output ports can be optionally RCA or SCART. This device transmits vivid video and hi-fi stereo sound from a VCR \cdot TV set \cdot DVD \cdot VCD \cdot Satellite Receiver or cable set top box to any TV or monitor. It can also be used in conjunction with a camcorder or CCD camera and turns into a wireless security monitoring system. As to the transmission capability, the signal can go up to 400 feet clear line-of -sight and even penetrate through walls. With the built-in IR remote extender, it allows the user to remotely control the audio/video sources in the other rooms. In addition, four user selectable channels allow multiple transmitters to multiple receivers operation in the same area. All these advanced features will make your home life amazingly convenient and joyful.

Applications

- •Simultaneous viewing of video programs on a 2nd TV/monitor without wires.
- •Wireless transmission of hi-fi stereo to any active speaker.
- •Remotes monitoring of live video from a camcorder or CCD camera.
- •Local area broadcasting of audio/video programs for multiple viewers even in different rooms.

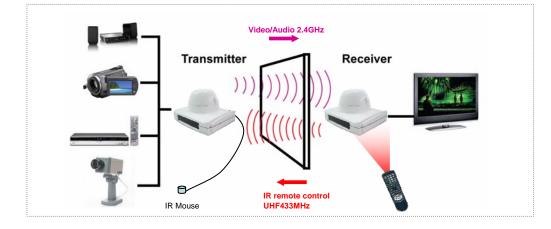

AIRWAVE

AIRWAVE TECHNOLOGIES INC. 4F,NO.9 INDUSTRIAL E. 9TH RD. SCIENCE-BASED INDUSTRIAL PARK TAIWAN R.O.C.

TEL.: 886-3-5778099 FAX : 886-3-5778199 http://www.airwave.com.tw

Copyright ©2007 AIRWAVE Technologies Inc. All Rights Reserved.

Accessory

- •AC/DC adaptor x2
- •RCA or SCART cable x2 •User manual x1
- •IR mouse x1

Housing color option

- •White (standard)
- Dark Gray (optional)

AWV699

Date: 2008.06.13 Rev. : 0

Page 2 of 2

General SPEC:

Frequency Range	5725 ~ 5875MHz
Channel Selection	PLL Synthesizer 7CH
Video/Audio Mod/Demod. Type.	FM-FM
Antenna Type.	Patch Antenna
Video Polarity	Negative
Supply Voltage	DC +9V
DC IN Jack	5.5mm
Power On Indicator	LED
Channel Selector	Slider switch
Built-In IR Remote Extender	Yes
Operating Frequency	433.92MHz
IR Extender Mod./ Demod. Type.	ASK

Transmitter SPEC:

Input Port	3.5mm stereo Phone Jack IN	
Output Power	20dBm \pm 3dB (20dBm) , 12dBm \pm 1dB (CE) 0dBm \pm 1dB (FCC)	
IR Extender Receiver		
Receiving Sensitivity	-95dBm,min	
IR Carrier Frequency	38KHz/57Khz, typ.	
IR LED Operation Range	4~5 Meters	
IR Extender Half Angle	± 45° Horizontal	
External IR LED Port	2.5mm Mono Phone Jack	

Receiver SPEC:

Output Port	3.5mm stereo Phone Jack OUT
Input Sensitivity	-85dBm, Typ. (@ Video S/N Ratio≧19dB)
Video Output	1VP-P ±0.2V
Video S/N Ratio	40dB, min
Audio Output	3Vp-p ± 0.3V
Audio S/N Ratio	50dB, typ. (+/-3dB
IR Extender Transmitter	
RF Output Power	3dBm ±2dB (USA) ; 10dBm ±2dB (Europe)
IR Receiver module carrier freq.	38KHz/57Khz, typ.
IR Sensor Operation Range	7.5 Meters, min
IR Sensor Half Angle	± 45° Horizontal



AIRWAVE TECHNOLOGIES INC. 4F,NO.9 INDUSTRIAL E. 9TH RD. SCIENCE-BASED INDUSTRIAL PARK TAIWAN R.O.C.

TEL.: 886-3-5778099 FAX: 886-3-5778199 http://www.airwave.com.tw

Copyright ©2007 AIRWAVE Technologies Inc. All Rights Reserved.