



RX

TX

Features

- Capable of operating at 2.4GHz ISM band digital transmission with 4 selectable channels
- Auto mute function for suppressing pop noise
- Low power consumption
- Transmission range up to 100ft.(Line-Of-Sight) with perfect reception
- Superior Signal-to-Noise ratio (80dB or higher) and stereo channel separation
- Headphone design for 360° omnidirectional reception.
- Auto channel track and hold for the receiver
- No interference from microwave ovens or cordless phones
- Ultra-comfortable closed ear-cup headphones with powerful heavy bass
- Charger for headphones battery doubles as DC power supply for transmitter
- Audio inputs to the transmitter from either analog line-in or digital USB
- Transmitter compatible with Windows OS 98SE / Me / 2000 / XP / Vista / 7


Description

Congratulations. You have purchased a high-performance, high-quality product which will give you many hours of pleasure. The AWS833D wireless stereo headphone system is specifically made for PC, TV, Hi-Fi, and A/V entertainment use. It utilizes state-of-the-art wireless digital audio technology to transmit and receive crystal-clear music up to 100 ft. distance even through wall and floors. It lets you sit where you like and enjoy freedom of movement without the hassle of wires while watching TV or listening to music.

The AWS813R lightweight headphone features a special design of a comfortable closed ear-cup which effectively enhances powerful heavy bass and isolates ambient noise. In addition, the comfortable closed ear-cup style has a soft cushion design that perfectly suits your ears by covering them completely. All these features will guarantee you not only a powerful bass and vibrant auditory feeling but exceptional audio fidelity, combined with quiet background and ultra-comfortable ear-cups.

Applications

- Watching TV or DVD Video. (TV or DVD player must have audio line out or earphone jack)
- Listening to music from iPod, MP3 or CD players.
- Listening to music from Notebook or Desktop PC.

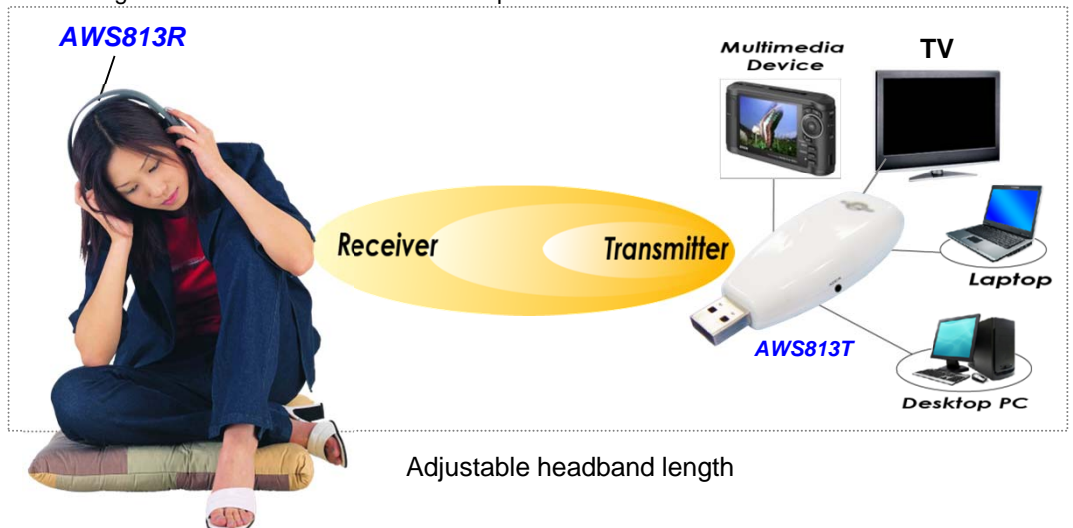

AIRWAVE

AIRWAVE TECHNOLOGIES INC.
4F,NO.9 INDUSTRIAL E. 9TH RD.
SCIENCE-BASED INDUSTRIAL
PARK,HSINCHU,TAIWAN R.O.C.

TEL.: 886-3-5778099
FAX : 886-3-5778199

<http://www.airwave.com.tw>

Copyright ©2010
AIRWAVE Technologies Inc.
All Rights Reserved.

**All Specification are subject to change without notice.

Airwave - Wireless Everywhere

Specifications

Item	Transmitter(AWS813T)	Receiver(AWS813R)
Supply voltage	5V DC	2.4~3.0V DC
Current consumption	90 mA (max.)	48 mA (Typ.)
Operating temperature	-10 ~ +60 °C	
Modulation	FHSS	
Channel number	8	
Channel spacing	11 MHz	
Channel frequency	2400 ~ 2483.5 MHz	
Frequency stability	±100 KHz	
Tx Power	15 dBm (typ.)	
Rx Sensitivity		-85 dBm (min.)
Speaker Impedance		32 Ohm (typ.)
Digital audio input	USB 1.0 or higher	
Analog audio input	3.5mm stereo phone jack	
Battery		2-Regular AAA (Not included) 2-Rechargeable AAA (not included)
Battery recharge		Built-in charger
DC Power Supply	USB port	3.5mm DC Jack (also for battery charger)
Audio input level	1Vrms (max.)	
Response	20 ~ 20KHz, -3dB	
Separation	80 dB (Typ.)	
Audio latency	3.8ms	
S/N ratio	80 dB (min.)	
THD (@ 1 KHz)	0.7% (max.)	
Dimensions	34*86.5*20 mm	178*177*60 mm
Weight	35g(typ.)	120g(typ.)

Packing content

- AWS813TX x1
- AWS813RX x1
- User manual x1
- Audio cable (2.5mm stereo phone to RCA plug) x1
- 5V DC Adaptor (male USB/3.5mm DC dual plug) x1

**All Specification are subject to change without notice.

Airwave - Wireless Everywhere



AIRWAVE

AIRWAVE TECHNOLOGIES INC.
4F,NO.9 INDUSTRIAL E. 9TH RD.
SCIENCE-BASED INDUSTRIAL
PARK,HSINCHU,TAIWAN R.O.C.

TEL.: 886-3-5778099

FAX : 886-3-5778199

<http://www.airwave.com.tw>

Copyright ©2008
AIRWAVE Technologies Inc.
All Rights Reserved.